

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 770 889 A2

(12)

# EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.05.1997 Bulletin 1997/18

(51) Int Cl.<sup>6</sup>: G02B 5/30, G02B 27/26

(21) Application number: 96307335.8

(22) Date of filing: 09.10.1996

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 13.10.1995 GB 9521035

(71) Applicant: SHARP KABUSHIKI KAISHA  
Osaka 545 (JP)

(72) Inventors:

- Davis, Gillian Margaret  
Abingdon, Oxon, OX14 1LZ (GB)


• Tillin, Martin David  
Abingdon, Oxon, OX14 2PG (GB)

(74) Representative: Robinson, John Stuart  
MARKS & CLERK,  
Alpha Tower,  
Suffolk Street Queensway  
Birmingham, B1 1TT (GB)

## (54) Optical element, method of making an optical element, and 3D display

(57) An optical element (1) is provided for micromanipulating the polarisation of light. The element may be embodied using liquid crystal polymers and suitable alignment layers to provide an array of first regions (A)

and second regions (B). The first regions (A) rotate the polarisation vector of light passing therethrough by first angle ( $\theta$ ) whereas the second regions (B) rotate the polarisation vector by a different angle ( $\psi$ ).

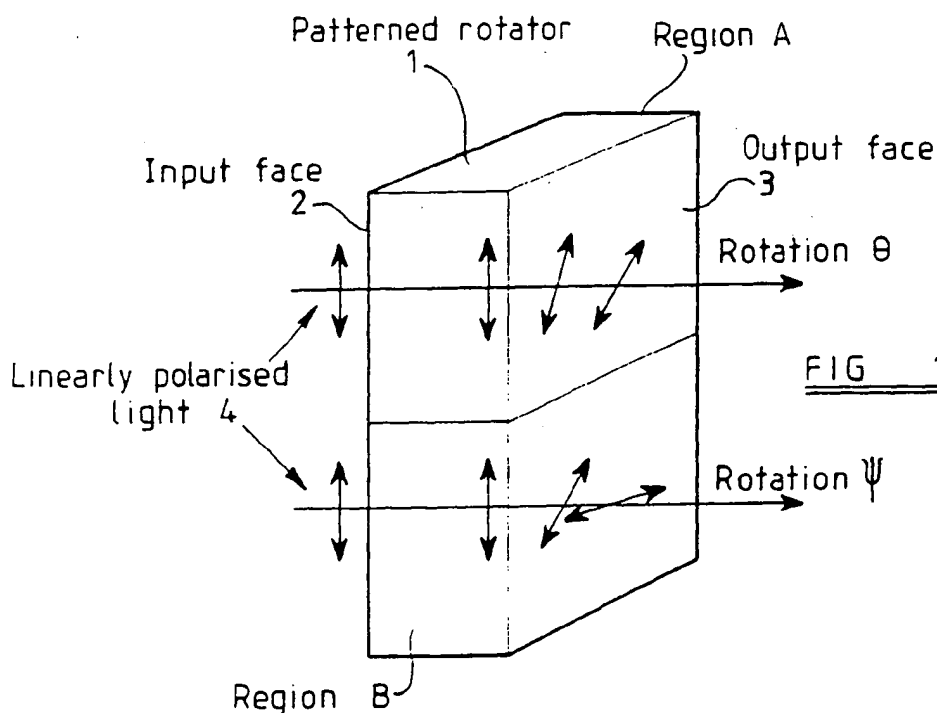

EP 0 770 889 A2

## Description

The present invention relates to an optical element, to a method of making such an optical element, to an optical element made by such a method, and to a 3D display. Such an element may be used as a polarisation micro-manipulator, for instance in liquid crystal displays.

Uniform polarisers i.e. polarisers which provide polarisation of light which is spatially uniform or invariant, are well known. The conventional method of making such polarisers for operation at visible wavelengths involves stretching a sheet of polyvinyl alcohol (PVA) and dipping the sheet into iodine or dye to form a sheet with polarising properties resulting from the alignment of the light-absorbing iodine or dye molecules with the stretch direction of the PVA. Although such polarisers provide very high extinction ratios and are suitable for many applications, they suffer from limitations which prevent or make difficult their use in certain applications. For instance, PVA is a water soluble and fragile material which must be laminated between more robust layers before use. Consequently, although the PVA film may have a very small thickness, for instance of about 20 micrometers, the protection layers substantially add to the overall thickness, typically to about 100 micrometers. Further, iodine has a boiling point of 183 degrees centigrade, which makes incorporation inside liquid crystal displays (LCD) difficult because of the temperatures involved during LCD manufacture.

A more recent technique for making polarisers is disclosed in EP 397263 and is based on a liquid crystal diacrylate monomer or dimethacrylate monomer and a dichroic colorant oriented by contact with a rubbed surface and then polymerised by exposure to ultraviolet radiation. Polarisers made by this technique retain their orientation characteristics up to 350 degrees centigrade and survive assembly within a liquid crystal display.

Patterned polarisers, in which different regions have different directions of polarisation, are disclosed by E H Land, J. Opt. Soc. Am. 30, 230, 1940 and in JP 63-158525, US 5,327,285, and US 5,235,449. Such patterned polarisers can be made using the conventional PVA-iodine technique or more recent techniques, for instance based on polydiacetylene derivative as disclosed in US 5,235,449. Although suitable for many uses, for instance in three dimensional (3D) stereoscopic displays, such patterned polarisers are not ideal because the polarisation of transmitted light varies spatially. For instance, where it is required that the light from such a polariser impinge on an anisotropic device and the operation of such a device should function with spatial invariance, such a patterned polariser may not be used on its own.

EP 457607 discloses a uniform optical polarisation rotator which rotates the direction of polarisation of light through a fixed angle i.e. by an angle which is spatially invariant. Polarisation rotation is achieved by the use of a uniform twisted nematic liquid crystal polymer film

whose thickness and birefringence are such that guiding of the polarisation state takes place due to the Mauguin effect across the visible spectrum. Such a rotator is advantageous compared with typical half wave retarders in that it is effective over a wider bandwidth. However, the polarisation rotator disclosed in EP 0 457 607 is not patterned and cannot provide polarisation selection.

Patterned polarisers and patterned retarders are disclosed in GB 2286058, GB 1002999, GB 7710784, GB 570983, GB 489888, US 5389698, JP 630158525 and EP 0445629.

GB 936788 discloses a polariser which is formed by means of a dichroic dye oriented by exposure to ultraviolet radiation.

According to a first aspect of the invention, there is provided an optical element as defined in the appended Claim 1.

According to a second aspect of the invention there is provided a method as defined in the appended Claim 7.

Preferred embodiments of the invention are defined in the other appended claims.

It is thus possible to provide an optical element which is capable of use as a polarisation micromanipulator in which different regions provide different angles of rotation of polarisation. Such elements are capable of being used within LCDs and, in particular, can withstand the temperatures during LCD manufacture. Further, such elements may be sufficiently thin and may be incorporated within displays so as to reduce the effects of cross talk between picture elements (pixels) so as to reduce parallax errors. Such elements can function over a relatively wide bandwidth, for instance over the whole of the visible bandwidth. Further, it is possible to provide optical elements which can present light of uniform or spatially invariant polarisation from one side thereof, from a spatially variant polarisation distribution on the other side thereof, for instance so that such elements may be used with or in anisotropic optical devices.

The invention will be further described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a diagrammatic view of an optical element constituting a first embodiment of the invention;

Figure 2 is a diagrammatic view of an optical element constituting a second embodiment of the invention;

Figure 3 is diagrammatic view of an optical element constituting a third embodiment of the invention;

Figure 4 is a diagrammatic cross sectional view illustrating a method of making an optical element of the type shown in Figure 3;

Figure 5 is a diagrammatic view of an optical element constituting a fourth embodiment of the invention:

Figure 6 is a diagrammatic view illustrating an alternating mode of operation of the optical element of Figure 5;

Figure 7 illustrates a transmissive 3D stereoscopic display using an optical element of the type shown in Figure 5;

Figure 8 illustrates a reflective 3D stereoscopic display using an optical element of the type shown in Figure 5 operating in the mode illustrated in Figure 6; and

Figure 9 illustrates a 3D autostereoscopic display using an optical element in the mode illustrated in Figure 6.

The optical element shown in Figure 1 comprises a liquid crystal polymer patterned polarisation rotator thin film element. The element comprises a plurality of regions A and B (only one each of which are shown) arranged as a regular alternating array such that the regions A and B alternate vertically and horizontally. The rotator 1 has an input face 2 and an output face 3 and is made from a liquid crystal polymer which rotates the polarisation direction or vector of linearly polarised light 4. Each of the regions A rotates the polarisation vector by an angle  $\theta$  whereas each of the regions B rotates the polarisation vector by an angle  $\psi$ .

The element is made from a film of birefringent material having a thickness  $d$  and a birefringence  $\Delta n$ . Those regions which rotate the polarisation vector have a twisted birefringent structure where the total angle of twist is  $\phi$  and, for incident optical radiation having an in vacuo wavelength (or maximum wavelength)  $\lambda$ ,  $\Delta n \cdot d > \phi \lambda / \pi$ , which is known as the Mauguin condition. Polarisation vector rotation is thus performed by the Mauguin effect and is achieved over a relatively wide bandwidth for incident linearly polarised radiation with the polarisation vector parallel or perpendicular to the optic axis of the birefringent material at the face where the radiation enters the material. The Mauguin condition is satisfied most easily for materials of high birefringence, such as liquid crystal material. Also, because liquid crystals orientate in a twisted structure merely by appropriate treatment of alignment surfaces, fabrication of patterned rotators is relatively simple, as described hereinafter.

The patterned rotator 1 shown in Figure 2 differs from that shown in Figure 1 in that each of the regions A rotates the polarisation vector by an angle of  $+\theta$  whereas each of the regions B rotates the polarisation vector by an angle of  $-\theta$ . Such an arrangement may be advantageous in that the operation of the regions A and B is substantially the same so that unwanted optical dif-

ferences, such as viewing angle variations, may be reduced or avoided.

The patterned rotator 1 shown in Figure 3 differs from that shown in Figures 1 and 2 in that each of the regions A rotates the polarisation vector by an angle of  $+90$  degrees whereas each of the regions B rotates the polarisation vector by zero angle i.e. provides no or zero rotation. The birefringent material in the regions B of this embodiment is thus untwisted.

The method of making a patterned rotator illustrated in Figure 4 may be used for any of the rotators 1 shown in Figures 1 to 3 but, by way of illustration, is shown for the rotator of Figure 3. A patterned alignment layer 10 is formed on a glass substrate 11 such that the alignment direction of a region 12 is perpendicular to the plane of Figure 4 whereas the alignment direction of a region 13 is in the plane of the drawing. The regions 12 and 13 for forming the regions A and B of the rotator are arranged in a repeating pattern such that the regions 12 and 13 alternate vertically and horizontally. The patterned alignment layer 10 may be formed by spinning a thin layer of polyamide onto the glass substrate 11 and rubbing the surface of the layer 10 through a mask to produce the desired alignment direction patterning. Alternatively, the layer 10 may be formed as a polymer film which has been illuminated by linearly polarised light through suitable masking. Such linearly photopolymerisable (LPP) layers can be made less than 200 nanometres thick and can be patterned easily using lithographic techniques and linearly polarised ultraviolet sources, for instance using the techniques disclosed in M. Schadt et al, "Surface-induced parallel alignment of liquid crystals by linearly polymerised photopolymers", Jpn. J. Appl. Phys. 31, 2155, 1992 and in J.L. West et al, "Polarised UV-exposed polyamide films for liquid crystal alignment", SID international symposium digest of technical papers, XXVI, 703, 1995.

A further substrate in the form of a polymer film 14 is provided with a rubbed polyamide alignment layer 15 having a uniform or spatially invariant alignment direction. A liquid crystal polymer (LCP) 16 is sandwiched between the alignment layers 10 and 15, which are oriented such that the alignment layers have their alignment directions relatively oriented as desired. In the arrangement shown in Figure 4, the alignment direction of the layer 15 is parallel to the alignment direction of the regions 13. The alignment layers 10 and 15 thus provide the required liquid crystal twist angle therebetween.

Although a uniform alignment layer 15 is illustrated, it is of course possible to provide a second patterned alignment layer in which alignment varies spatially.

Once the orientation of the LCP 16 has been achieved, this is permanently fixed. For instance, in the case of a LCP which can be fixed by ultraviolet polymerisation or ultraviolet cross linking, this may be achieved by exposure to ultraviolet light. If a LPP film has been used to provide one or both of the alignment layers, it may be necessary temporarily to freeze the liq-

uid crystal alignment by cooling to the glassy state so as to ensure that any change to the LPP on exposure to ultraviolet light for fixing the liquid crystal alignment does not affect the alignment. However, this may not be necessary where the sensitivity of the LPP to ultraviolet light is sufficiently less than that of the ultraviolet polymerisable or cross linkable LCP.

In order to minimise the thickness of the rotator, for instance so as to avoid cross talk between neighbouring pixels when the rotator is used within a LCD, the polymer film and the alignment layer 15 may be removed after fixing of the alignment of the LCP 16. The resulting free surface of the LCP 16 is then suitable for processing substantially in the usual way for LCD fabrication and the glass substrate 11 may form one of the substrates of the display.

By adding anisotropic dye molecules to the polarisation rotators described hereinbefore, it is possible to produce a combined polarisation micromanipulator and such a device is illustrated in Figure 5. In particular, the micromanipulator 20 of Figure 5 differs from that of Figure 3 by performing patterned rotation and polarisation of incoming unpolarised light. The micromanipulator 20 of Figure 5 may be made by the method illustrated in Figure 4 merely by adding the anisotropic dye molecules to the LCP 16 before sandwiching between the alignment layers 10 and 15.

Vertically polarised light 21 incident on each of the regions A and B is absorbed. Horizontally polarised light 22 incident on each of the regions A passes through the region and is rotated through an angle determined by the twist of the LCP, for instance by 90 degrees as shown in Figure 5. Horizontally polarised light 23 incident on each of the regions B is transmitted without rotation of the polarisation vector. Thus, the regions A and B transmit light of orthogonal polarisations although the polarisation state of the transmitted incident light is horizontal for all of the regions.

Figure 6 shows the result of illuminating the micromanipulator 20 in the opposite direction compared with that illustrated in Figure 5. In this case, vertically polarised incident light 24 passes through each of the regions A but has the rotation vector rotated by 90 degrees whereas horizontally polarised light 25 is absorbed. For each of the regions B, vertically polarised light 26 is absorbed whereas horizontally polarised light 27 passes through the region without rotation of the polarisation vector. Thus, output light from the micromanipulator 20 with light passing in the direction shown in Figure 6 is of uniform polarisation but corresponds to orthogonally polarised input light.

It is possible to fabricate the micromanipulator 20 for use across the whole visible spectrum. For instance, with a guest-host dyed liquid crystal diacrylate monomer with a 2% black dye concentration, it is possible to achieve acceptable polarisation extinction ratios. In particular, at a wavelength of 550 nanometres, a birefringence of 0.2, a layer thickness of 24.7 micrometers and

an order parameter of 0.7, the ratio of horizontally polarised light passing through the regions A and B of the micromanipulator 20 shown in Figure 6 is 1:959 and for vertical polarisation is 569:1. Matched transmission for orthogonal polarisations may be obtained by adding dye to the patterned structure shown in Figure 2. In particular, for the example given above and for rotation angles  $\theta = \pm 45$  degrees, the ratio of the emergent orthogonal polarisations is 872:1 irrespective of whether the incident polarisation is vertical or horizontal.

The micromanipulator 20 may be made in essentially the same way as the patterned rotators 1 as illustrated in Figure 4. However, to avoid absorption by the dye molecules of the ultraviolet light used for curing the LCP, the ultraviolet light may be linearly polarised and oriented orthogonal to the absorbing direction of the dye molecules, for instance horizontally polarised (polarisation vector perpendicular to the plane of the drawing) in Figure 4. This is most easily achieved by illuminating through the uniform alignment layer 15 (when present). Guiding of the ultraviolet light due to the Mauguin effect ensures that the whole structure of the LCP is fixed.

If the micromanipulator 20 is to be used inside a LCD, a diffusion barrier layer similar to that used for LCD dye colour filters may be necessary, although the dye molecules are essentially locked into the LCP matrix by the ultraviolet fixing.

Figure 7 illustrates use of the micromanipulator 20 of Figure 5 with an anisotropic device to form a transmissive 3D stereoscopic display. The micromanipulator 20 including the glass substrate 11 forms one surface of the display which further comprises an input linear polariser 30, a further glass substrate 31, and a liquid crystal layer 32. The liquid crystal layer 32 includes suitable alignment layers and electrode arrangements (not shown) such that the layer 32 is pixellated with the pixels being aligned with the regions of the micromanipulator 20. The pixels of the liquid crystal layer 32 aligned with the regions A of the micromanipulator 20 display a left eye image of a stereoscopic pair whereas the pixels aligned with the regions B display the right eye image.

In use, a source of unpolarised backlight illuminates the display through the linear polariser 30. The pixels of the liquid crystal layer 32 modulate the transmitted light. The regions A of the micromanipulator 20 rotate the polarisation of output light from the layer 32 such that it is polarised in the plane of Figure 7 whereas the regions B provide no rotation so that the polarisation vector of light passing therethrough is perpendicular to the plane of Figure 7.

An observer wears analysing spectacles comprising a linear polariser 33 in front of the left eye 34 and a linear polariser 35 in front of the right eye 36. The linear polarisers 33 and 35 have orthogonal polarisation directions such that the polariser 33 transmits light polarised in the plane of Figure 7, i.e. from the regions A, while blocking the orthogonally polarised light from the regions B whereas the polariser 35 passes light polarised

perpendicularly to the plane of Figure 7, i.e. from the regions B, but substantially blocks light from the regions A. Thus, the left and right eyes 34 and 36 of the observer see the left and right eye images, respectively, whereas light from the right and left eye images, respectively, is attenuated by the polarisers 33 and 35, respectively, so as to be imperceptible.

The 3D stereoscopic display shown in Figure 8 differs from that shown in Figure 7 in that it operates in the reflective mode using unpolarised ambient light. A mirror 38 is disposed behind the linear polariser 30 and the micromanipulator 20 is disposed with the orientation illustrated in Figure 6.

The regions A block light polarised perpendicular to the plane of the drawing while rotating light polarised parallel to the plane of the drawing. The regions B block light polarised in the plane of the drawing while passing light polarised perpendicular to the plane of the drawing without rotation. Thus, light entering the liquid crystal layer 32 from the micromanipulator 20 is uniformly polarised perpendicular to the plane of the drawing.

With the adjacent pixels of the layer 32 in a first state, light passing through the layer 32 is rotated by 90 degrees, is passed through the linear polariser 30, is reflected by the mirror 38, and passes back through the polariser 30 and the layer 32 with rotation of the polarisation vector. Thus, these pixels appear bright. Pixels in the other state pass the light without rotation of the polarisation vector. Such light is absorbed by the linear polariser 30. The regions A rotate the polarisation vector by 90 degrees whereas the regions B pass the light without rotation of the polarisation vector. Thus, light from the regions A is polarised such that it passes through the linear polariser 35 to the right eye 36 of an observer whereas orthogonally polarised light from the regions B is blocked by the polariser 35. Similarly, light from the regions B passes through the polariser 33 to the eye 34 of the observer whereas orthogonally polarised light from the regions A is blocked by the polariser 33.

Figure 9 illustrates a transmissive 3D autostereoscopic display of a type disclosed in EP 0721132. The display of Figure 9 comprises the glass substrate 11, the micromanipulator 20, the liquid crystal layer 32, the glass substrate 31, and the linear polariser 30 as shown in Figure 7 but with light passing through this arrangement in the opposite direction. Light sources 40 and 41 are disposed behind linear polarisers 42 and 43, respectively, with orthogonal polarisation directions. A lens 44 images light from the sources 40 and 41 through the display arrangement at viewing windows for the left and right eyes 34 and 36, respectively. The regions A of the micromanipulator 20 pass light from the light source 40 and the linear polariser 42 while substantially blocking light from the light source 41 and linear polariser 43. Conversely, the regions B of the micromanipulator 20 pass light from the light source 41 and the linear polariser 43 while blocking light from the light source 40 and the linear polariser 42. The regions A rotate the polari-

sation vector of the light from the light source 40 and the linear polariser 42 so that light entering the liquid crystal layer 32 has a constant polarisation vector. The pixels adjacent the regions A of the micromanipulator 20 display a left eye image whereas the regions B display a right eye image. When the eyes 34 and 36 of an observer are located in the left and right viewing windows, respectively, the observer sees a 3D image without having to wear any viewing aids, such as the polarising spectacles comprising the linear polarisers 33 and 35 shown in Figures 7 and 8.

Although the elements shown in the accompanying drawings have regions A and B of the same size and shape arranged in a regular pattern, any other desired arrangement may be provided. Thus, the regions A and B can be of different shapes and sizes and may be arranged in any desired pattern in accordance with the application.



For optical elements of the type shown in Figures 1 to 3 which do not include the polarisation function, incident light should be polarised with the polarisation vector parallel or perpendicular to the LCP director. In these circumstances, the element functions as a pure rotator of wide bandwidth. Other orientations of the polarisation vector with respect to the LCP director alignment will result in the element displaying retarding effects so that the full advantage of wide optical bandwidth rotation will not be achieved.



It is thus possible to provide an optical element which may be used with an anisotropic optical device whose functionality depends upon the polarisation state of the light with which it is illuminated. The use of a thin film optical element which can micro-manipulate the polarisation state of light can improve or extend the applications of such anisotropic devices.

## Claims



1. A patterned polarisation-rotating optical element characterised by comprising a layer (16) of birefringent material having a thickness  $d$  and birefringence  $\Delta n$ , the layer (16) comprising at least one first region (A) and at least one second region (B), the or each of at least one of the first and second regions (A, B) comprising twisted birefringent material having a fixed twist angle  $\phi$  such that  $\Delta n \cdot d > \phi \lambda / \pi$ , where  $\lambda$  is the wavelength in vacuum of optical radiation, so that the or each first region (A) provides a first fixed angle of rotation of polarisation of light and the or each second region (B) provides a second fixed angle of rotation of polarisation of light, the second angle being different from the first angle.
2. An element as claimed in Claim 1, characterised in that the second angle is substantially equal to zero.
3. An element as claimed in Claim 1 or 2, character-



- used in that the first angle is substantially equal to 90 degrees.
4. An element as claimed in Claim 1, characterised in that the first angle is equal to  $+\theta$  degrees and the second angle is substantially equal to  $-\theta$  degrees.
  5. An element as claimed in any one of the preceding claims, characterised in that the birefringent material is a liquid crystal polymer.
  6. An element as claimed in Claim 5, characterised in that the liquid crystal polymer includes an anisotropic dye.
  7. A method of making a patterned polarisation-rotating optical element, comprising forming a layer (16) of birefringent material having a thickness  $d$  and a birefringence  $\Delta n$ , the layer (16) comprising at least one first region (A) and at least one second region (B), and providing in the birefringent material of the or each of at least one of the first and second region (A, B) a fixed twist angle  $\phi$  such that  $\Delta n \cdot d > \phi \lambda / \pi$ , where  $\lambda$  is the wavelength in vacuum of optical radiation, so that the or each first region (A) provides a first fixed angle of rotation of polarisation of light and the or each second region (B) provides a second fixed angle of rotation of polarisation of light, the second angle being different from the first angle.
  8. A method as claimed in Claim 7, characterised by disposing a liquid crystal between first and second alignment layers (10, 15).
  9. A method as claimed in Claim 8, in which the first alignment layer (15) has a uniform alignment direction and the second alignment layer (10) has a spatially varying alignment direction.
  10. A method as claimed in Claim 8 or 9, characterised by fixing the alignment of the liquid crystal.
  11. A method as claimed in Claim 10, characterised by removing at least one (15) of the first and second alignment layers (10, 15) after fixing the alignment of the liquid crystal.
  12. A method as claimed in any one of Claims 8 to 11, characterised in that at least one of the first and second alignment layers (10, 15) is a linearly photopolymerisable layer.
  13. A method as claimed in Claim 12, characterised in that before disposing the liquid crystal between the first and second alignment layers (10, 15), the or each linearly photopolymerisable layer (10, 15) is exposed to linearly polarised light.
  14. A method as claimed in Claim 13, characterised in that the linearly polarised light is linearly polarised ultraviolet light.
  15. A method as claimed in any one of Claims 12 to 14, when dependent on Claim 10, characterised in that the fixing of the liquid crystal alignment is performed by exposure to light.
  16. A method as claimed in Claim 15, characterised in that the exposure to light comprises exposure to ultraviolet light.
  17. A method as claimed in Claim 15 or 16, characterised in that the liquid crystal is cooled so as to freeze the alignment thereof before the fixing.
  18. A method as claimed in any one of Claims 8 to 17, characterised in that the liquid crystal includes an anisotropic dye.
  19. A method as claimed in Claim 18 when dependent on Claims 15 or 16, characterised in that the fixing of the liquid crystal alignment is performed by exposure to light polarised substantially perpendicularly to the direction of dye molecules of the anisotropic dye.
  20. An optical element made by a method as claimed in any one of Claims 7 to 19.
  21. A 3D display characterised by including an optical element as claimed in any one of Claims 1 to 6 and 20.

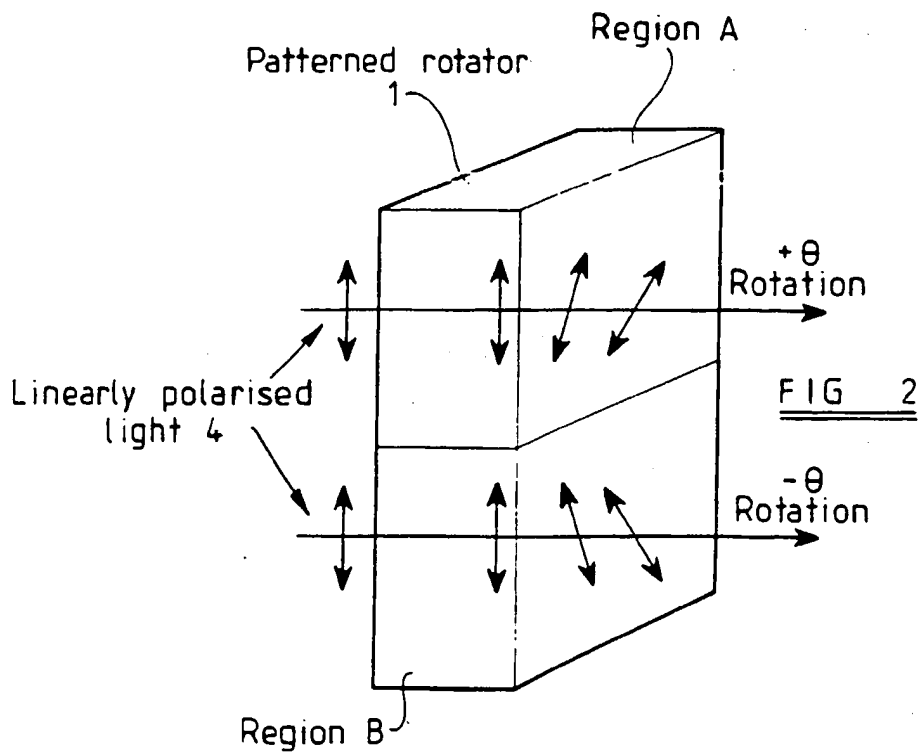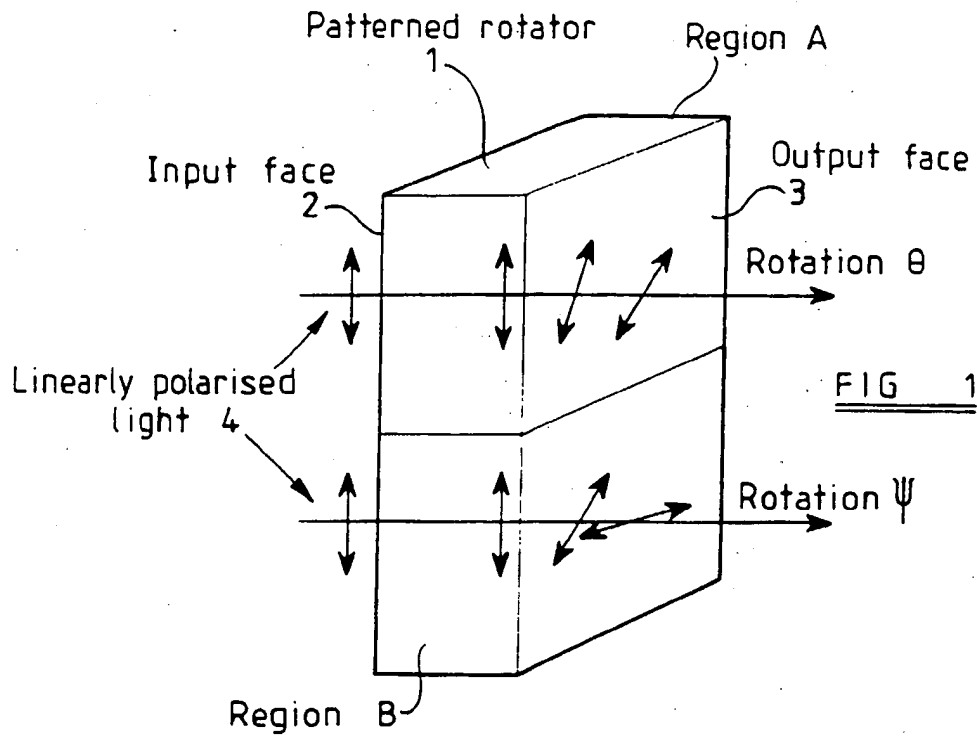

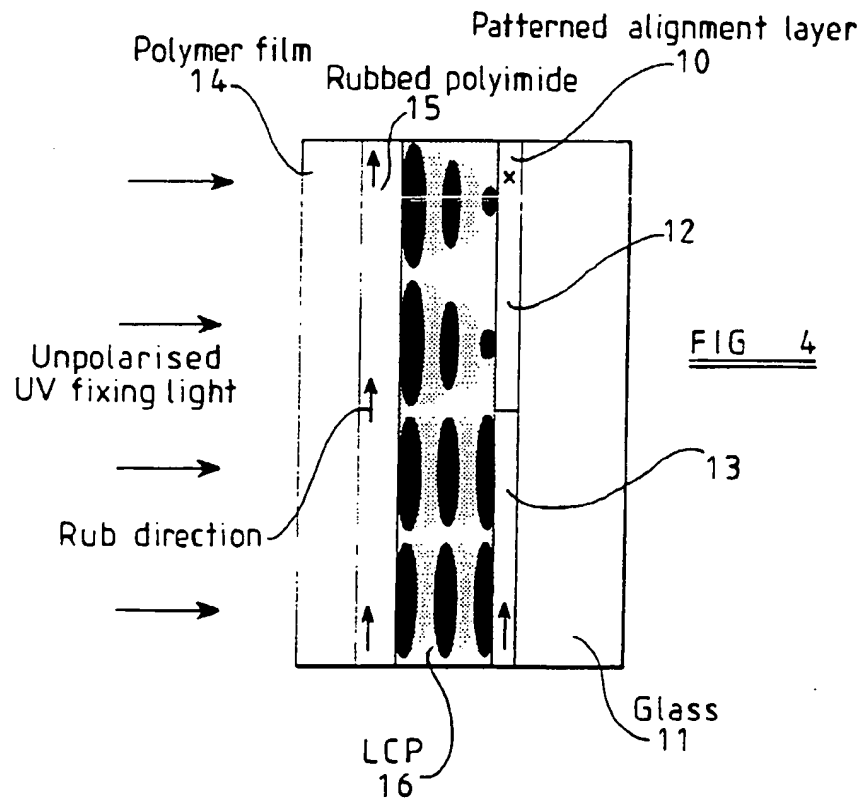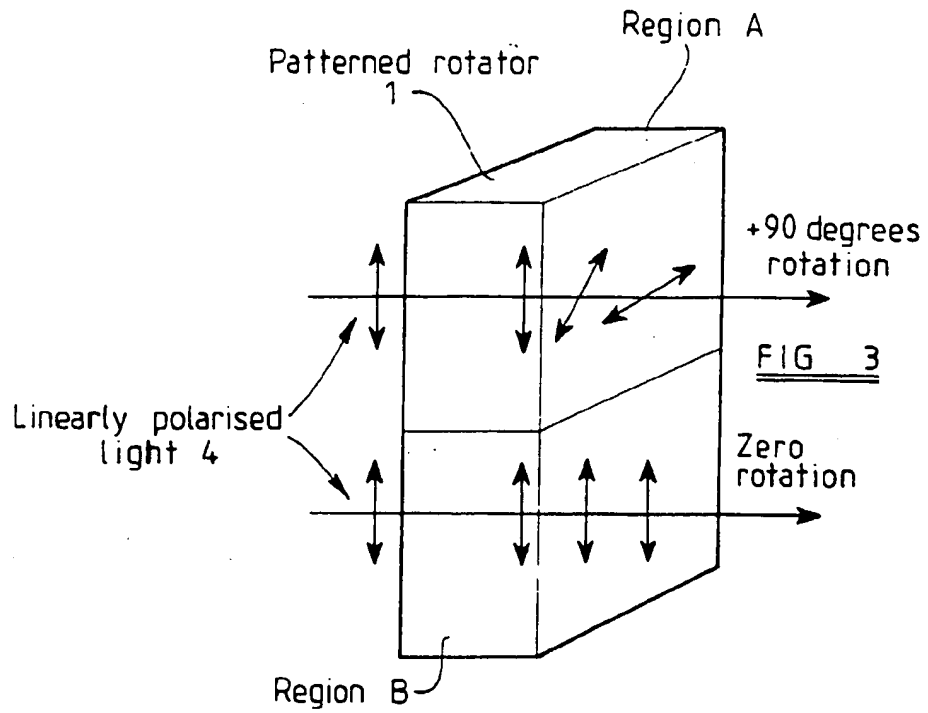



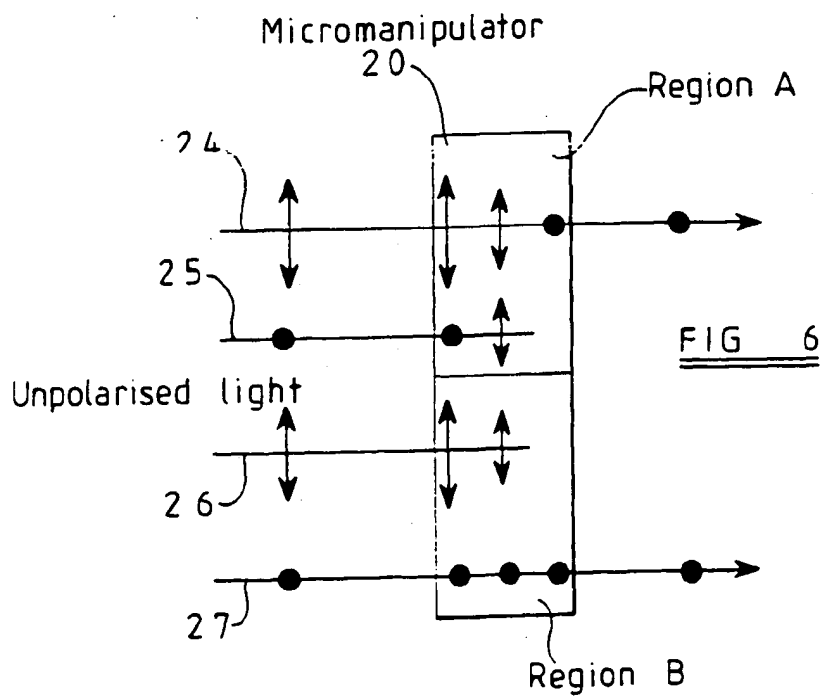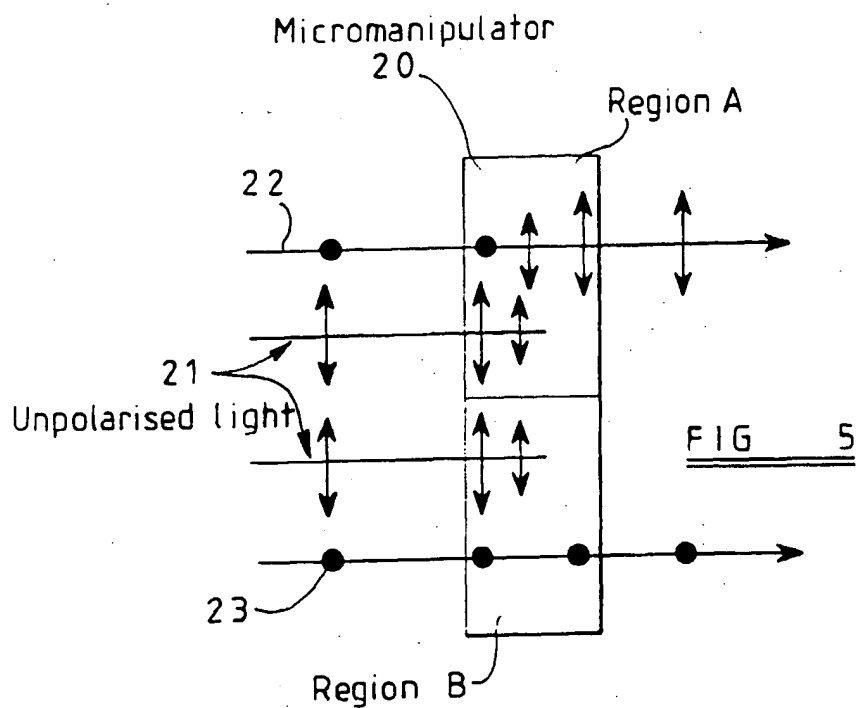

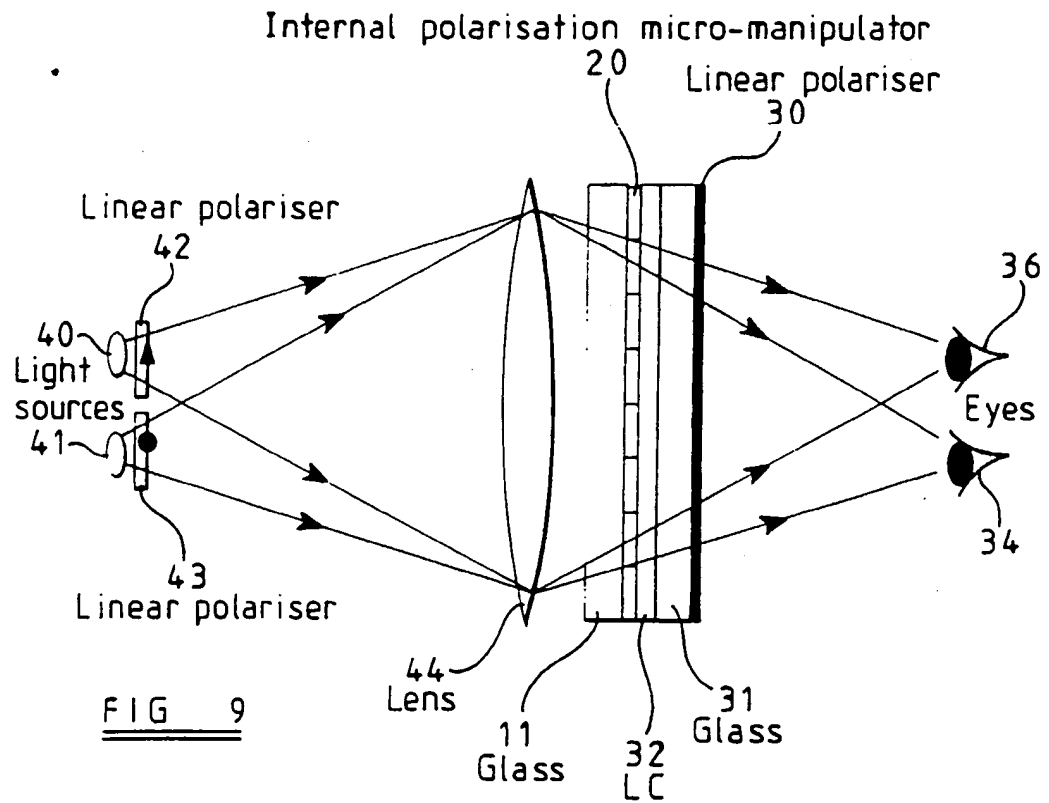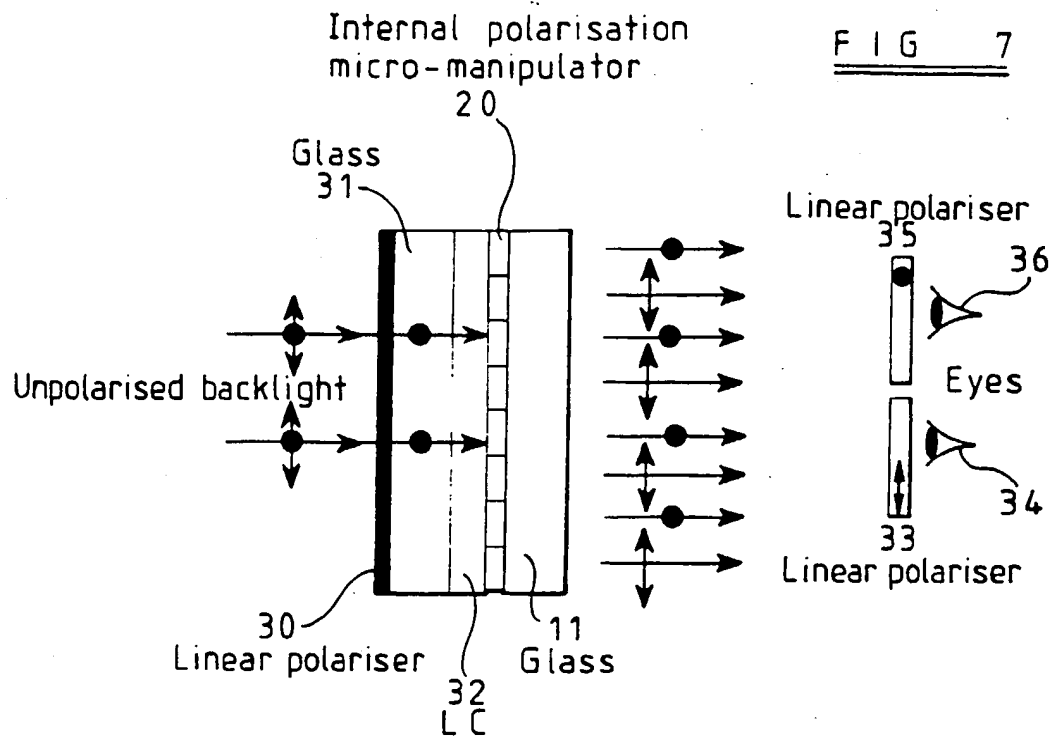


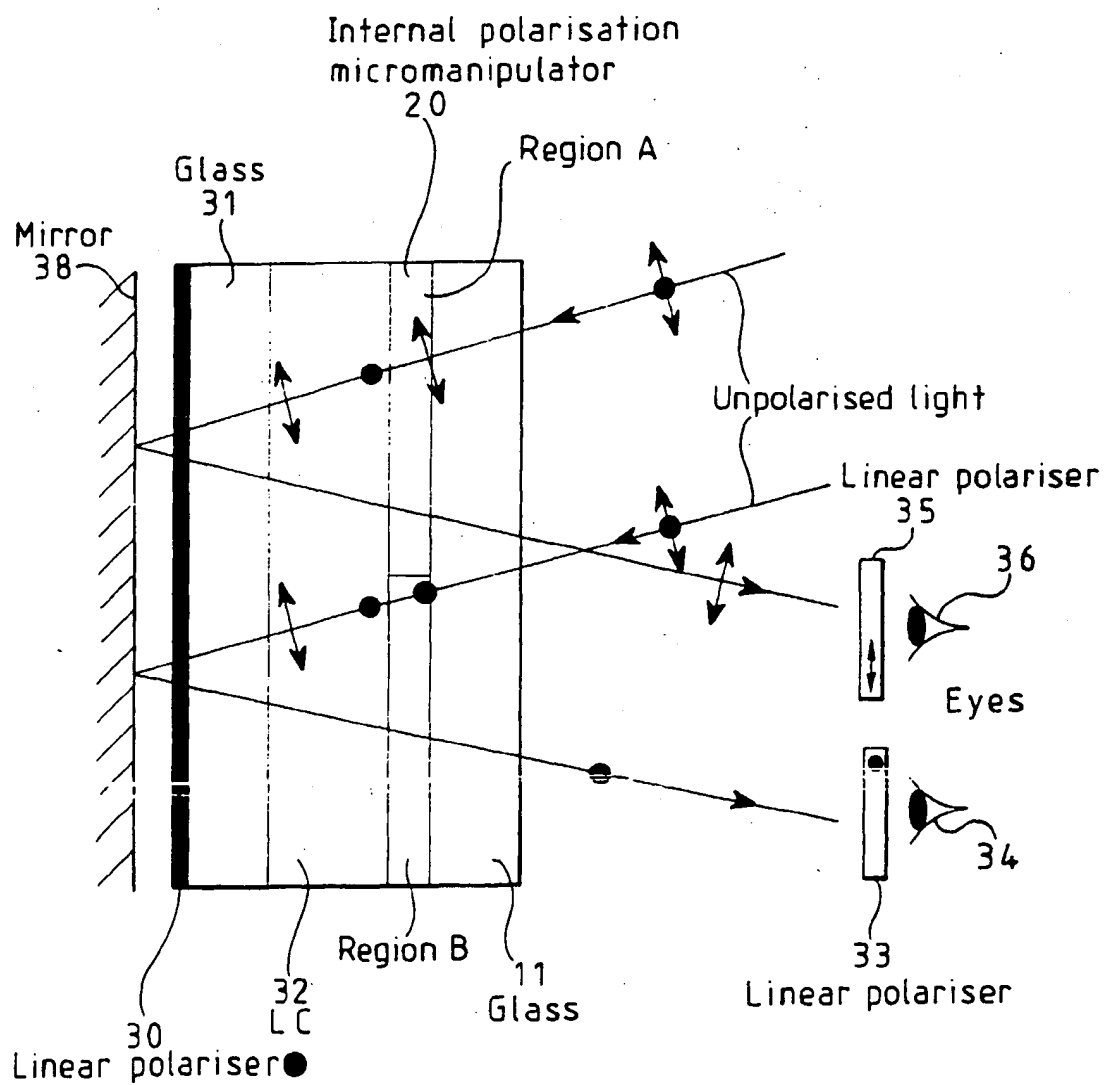


FIG 8





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 770 889 A3

(12)

# EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
20.05.1998 Bulletin 1998/21

(51) Int Cl.<sup>6</sup>: G02B 5/30, G02B 27/26

(43) Date of publication A2:  
02.05.1997 Bulletin 1997/18

(21) Application number: 96307335.8

(22) Date of filing: 09.10.1996

(84) Designated Contracting States:  
DE FR GB

• Tillin, Martin David  
Abingdon, Oxon, OX14 2PG (GB)

(30) Priority: 13.10.1995 GB 9521035


(74) Representative: Robinson, John Stuart  
Marks & Clerk  
Nash Court  
Oxford Business Park South  
Oxford OX4 2RU (GB)

(71) Applicant: SHARP KABUSHIKI KAISHA  
Osaka-shi, Osaka-fu 545 (JP)

(72) Inventors:  
• Davis, Gillian Margaret  
Abingdon, Oxon, OX14 1LZ (GB)

## (54) Optical element, method of making an optical element, and 3D display

(57) An optical element (1) is provided for micromanipulating the polarisation of light. The element may be embodied using liquid crystal polymers and suitable alignment layers to provide an array of first regions (A) and second regions (B). The first regions (A) rotate the polarisation vector of light passing therethrough by first angle ( $\theta$ ) whereas the second regions (B) rotate the polarisation vector by a different angle ( $\psi$ ).

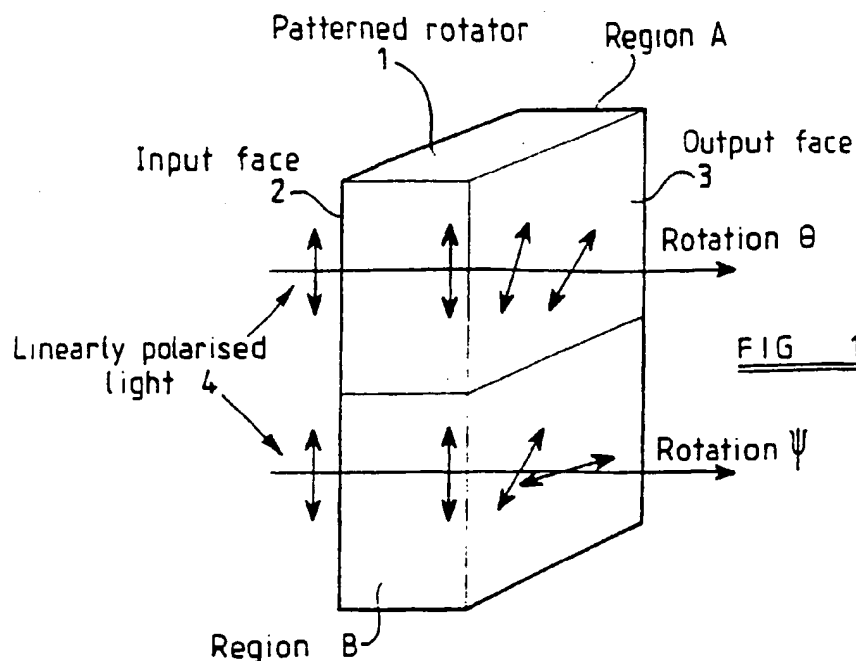

EP 0 770 889 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 7335

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	<p>SCHADT M ET AL: "PHOTO-GENERATION OF LINEARLY POLYMERIZED LIQUID CRYSTAL ALIGNING LAYERS COMPRISING NOVEL, INTEGRATED OPTICALLY PATTERNED RETAINED AND COLOR FILTERS"</p> <p>JAPANESE JOURNAL OF APPLIED PHYSICS, vol. 34, no. 6A, 1 June 1995, pages 3240-3249, XP000579023</p> <p>* the whole document *</p> <p>---</p>	1-5,7,8	G02B5/30 G02B27/26
X	<p>SCHADT M ET AL: "PHOTO-INDUCED ALIGNMENT AND PATTERNING OF HYBRID LIQUID CRYSTALLINE POLYMER FILMS ON SINGLE SUBSTRATES"</p> <p>JAPANESE JOURNAL OF APPLIED PHYSICS, vol. 34, no. 6B, 15 June 1995, pages L764-L767, XP000578770</p> <p>* the whole document *</p>	7,8	
A	* the whole document *	10,12	
A	* page L764, column 1, paragraph 2 *	13-16	
Y	<p>BAHADUR, B.: "Liquid Crystals - Applications and Uses"</p> <p>1990, WORLD SCIENTIFIC, SINGAPORE</p> <p>XP002059180</p> <p>* page 232, paragraph 10.2.1 - page 234, line 20, paragraph 10.2.2; figure 10.1 *</p> <p>---</p>	1-3	<p>TECHNICAL FIELDS SEARCHED (Int.Cl.6)</p> <p>G02B</p>
X	<p>KANEKO T ET AL: "LIQUID CRYSTAL POLARIZATION ROTATOR: OPTICAL ELEMENT FOR INTERMODULATION SPATIAL-BANDWIDTH REDUCTION IN HOLOGRAPHY"</p> <p>OPTICS COMMUNICATIONS, vol. 32, no. 2, 1 February 1980, pages 220-224, XP000577348</p> <p>* abstract *</p> <p>* page 221, line 12, paragraph 3; figure 2 *</p> <p>---</p> <p style="text-align: center;">-/--</p>	1-3	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		17 March 1998	Hervé, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone</p> <p>Y: particularly relevant if combined with another document of the same category</p> <p>A: technological background</p> <p>C: non-written disclosure</p> <p>P: intermediate document</p> <p>T: theory or principle underlying the invention</p> <p>E: earlier patent document but published on, or after the filing date</p> <p>D: document cited in the application</p> <p>L: document cited for other reasons</p> <p>&amp;: member of the same patent family corresponding document</p>			

EPO FORM 1503 03 82 (7/94C01)

EUROPEAN SEARCH REPORT

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US 5 235 449 A (IMAZEKI SHUJI ET AL) 10 August 1993 * abstract * * column 2, line 1 - line 62; claims 1.2; figures 7.A-H * -----	1-3	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	17 March 1998	Hervé, D	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background U : non-written disclosure P : intermediate document * : member of the same patent family, corresponding document	

